

## SURFACE MOUNT RECTIFIERS


## FEATURES

- ◇ Plastic package has underwriters laborator flammability classification 94V-0
- ◇ For surface mounted applications
- ◇ Low profile package
- ◇ Built-in strain relief,ideal for automated placement
- ◇ High temperature soldering:  
250 °C/10 seconds at terminals

## MECHANICAL DATA

- ◇ Case:JEDEC SMAJ,molded plastic
- ◇ Terminals:Solder plated, solderable per ML-STD-750, Method 2026
- ◇ Polarity: color band denotes cathode end
- ◇ Weight: 0.003 ounces, 0.084 grams

**REVERSE VOLTAGE: 50 --- 1000 V**  
**CURRENT: 1.0 A**

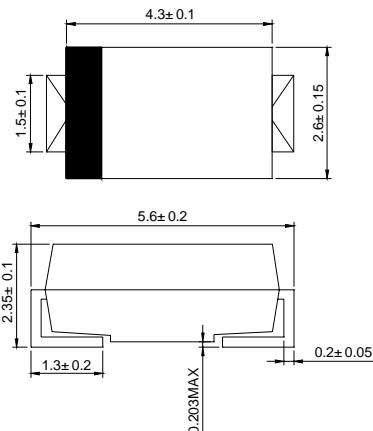**SMAJ**

Dimensions in millimeters

**MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS**

Ratings at 25°C ambient temperature unless otherwise specified


|   |                                      | RS1AJ | RS1BJ | RS1DJ | RS1GJ            | RS1JJ | RS1KJ | RS1MJ | UNITS |
|---|--------------------------------------|-------|-------|-------|------------------|-------|-------|-------|-------|
| Device marking  | RS1A                                 | RS1A  | RS1B  | RS1D  | RS1G             | RS1J  | RS1K  | RS1M  |       |
| Maximum recurrent peak reverse voltage  | V <sub>RRM</sub>                     | 50    | 100   | 200   | 400              | 600   | 800   | 1000  | V     |
| Maximum RMS voltage   | V <sub>RWS</sub>                     | 35    | 70    | 140   | 280              | 420   | 560   | 700   | V     |
| Maximum DC blocking voltage   | V <sub>DC</sub>                      | 50    | 100   | 200   | 400              | 600   | 800   | 1000  | V     |
| Maximum average forward rectified current @ T <sub>L</sub> =90°C  | I <sub>F(AV)</sub>                   |       |       |       |                  | 1.0   |       |       | A     |
| Peak forward surge current 8.3ms single half-sine-wave superimposed on rated load                       | I <sub>FSM</sub>                     |       |       |       |                  | 30.0  |       |       | A     |
| Maximum instantaneous forward voltage at 1.0A   | V <sub>F</sub>                       |       |       |       | 1.30             |       |       |       | V     |
| Maximum DC reverse current @T <sub>A</sub> =25°C<br>at rated DC blocking voltage @T <sub>A</sub> =125°C | I <sub>R</sub>                       |       |       |       | 5.0              |       |       |       | µA    |
|   |                                      |       |       |       | 50.0             |       |       |       |       |
| Maximum reverse recovery time (NOTE 1)  | t <sub>rr</sub>                      |       |       | 150   |                  | 250   | 500   |       | ns    |
| Typical junction capacitance (NOTE 2)   | C <sub>J</sub>                       |       |       |       | 10               |       | 7.0   |       | pF    |
| Typical thermal resistance (NOTE 3)   | R <sub>θJA</sub><br>R <sub>θJL</sub> |       |       |       | 105              |       |       |       | °C/W  |
|   |                                      |       |       |       | 32               |       |       |       |       |
| Operating junction and storage temperature range  | T <sub>J</sub> T <sub>STG</sub>      |       |       |       | - 55 ----- + 150 |       |       |       | °C    |

NOTE: 1.Reverse recovery time test conditions:I<sub>F</sub>=0.5A,I<sub>R</sub>=1.0A,I<sub>rr</sub>=0.25A


2. Measured at 1.0MHz and applied reverse voltage of 4.0 Volts

3. Thermal resistance from junction to ambient and junction to lead P.C.B.mounted on 0.2"X0.2"(5.0X5.0mm<sup>2</sup>) copper pad areas


**Fig. 1 — Forward Current Derating Curve**

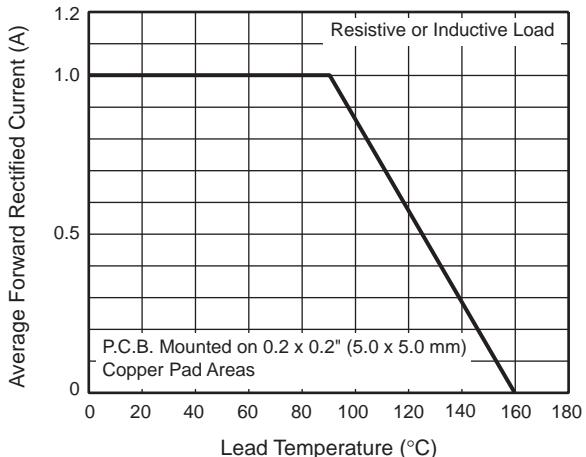


**Fig. 2 — Maximum Non-Repetitive Peak Forward Surge Current**

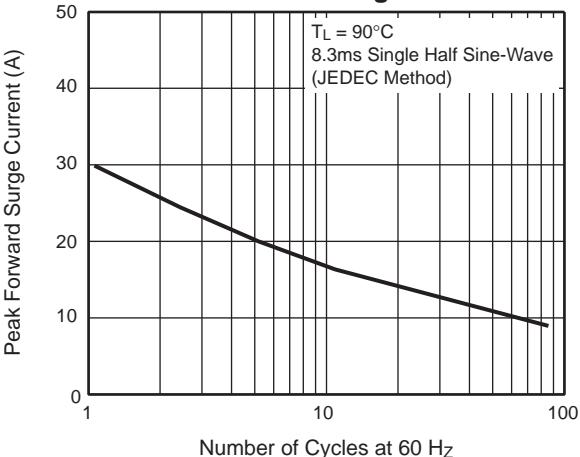


**Fig. 3 — Typical Instantaneous Forward Characteristics**

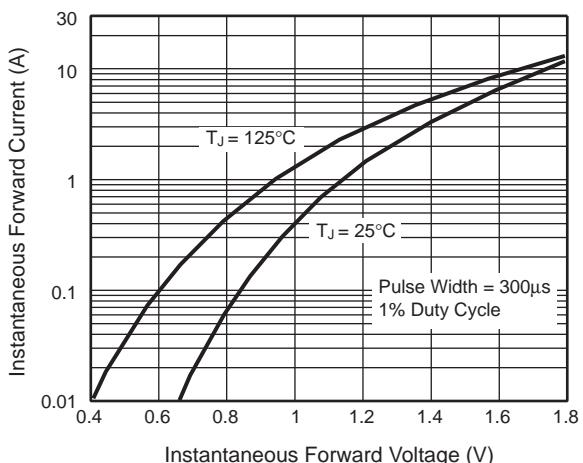

**Fig. 4 — Typical Reverse Characteristics**

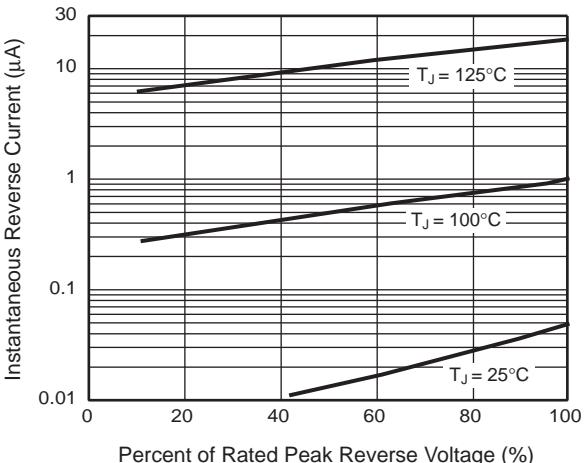

**Fig. 5 — Typical Junction Capacitance**

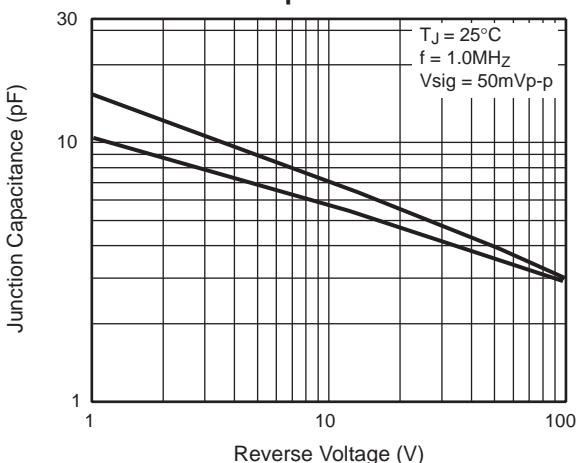

**Fig. 6 — Typical Transient Thermal Impedance**

