

**PLASTIC SILICON RECTIFIERS**


**VOLTAGE RANGE: 50 --- 1000 V**  
**CURRENT: 1.0 A**

**FEATURES**

- ◇ Low cost
- ◇ Diffused junction
- ◇ Low leakage
- ◇ High current capability
- ◇ Easily cleaned with Freon, Alcohol, Isopropanol and similar solvents
- ◇ The plastic material carries U/L recognition 94V-0

**MECHANICAL DATA**

- ◇ Case: JEDEC R-1, molded plastic
- ◇ Terminals: Axial lead, solderable per MIL-STD-202, Method 208
- ◇ Polarity: Color band denotes cathode
- ◇ Weight: 0.007 ounces, 0.20 grams
- ◇ Mounting position: Any

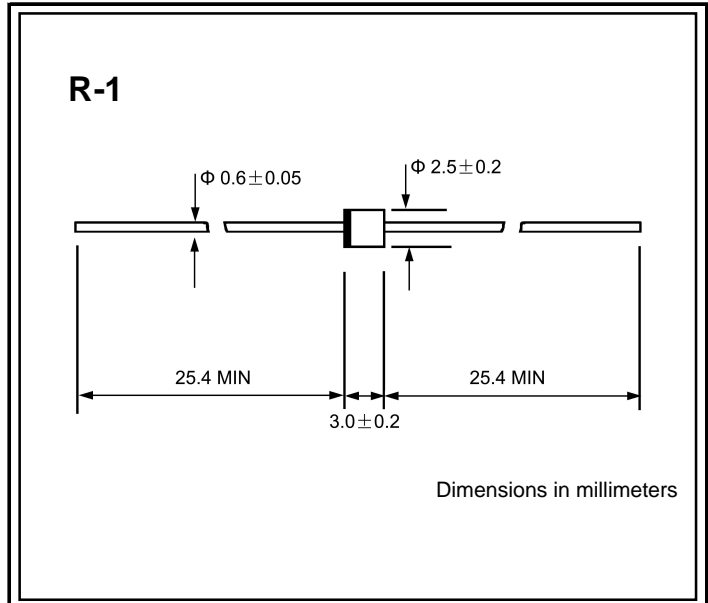

**MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS**


Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate by 20%.


		1A1	1A2	1A3	1A4	1A5	1A6	1A7	UNITS
Maximum recurrent peak reverse voltage	$V_{RRM}$	50	100	200	400	600	800	1000	V
Maximum RMS voltage	$V_{RMS}$	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	$V_{DC}$	50	100	200	400	600	800	1000	V
Maximum average forward rectified current 9.5mm lead length, @ $T_A=75^\circ C$	$I_{F(AV)}$	1.0							A
Peak forward surge current 8.3ms single half-sine-wave superimposed on rated load @ $T_j=125^\circ C$	$I_{FSM}$	30.0							A
Maximum instantaneous forward voltage @ 1.0 A	$V_F$	1.0							V
Maximum reverse current @ $T_A=25^\circ C$ at rated DC blocking voltage @ $T_A=100^\circ C$	$I_R$	5.0 50.0							$\mu A$
Typical junction capacitance (Note1)	$C_J$	15							pF
Typical thermal resistance (Note2)	$R_{\theta JA}$	50							$^\circ C/W$
Operating junction temperature range	$T_j$	- 55 ---- + 150							$^\circ C$
Storage temperature range	$T_{STG}$	- 55 ---- + 150							$^\circ C$

NOTE: 1. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.  
 2. Thermal resistance from junction to ambient.


**FIG.1 - TYPICAL FORWARD CHARACTERISTIC**

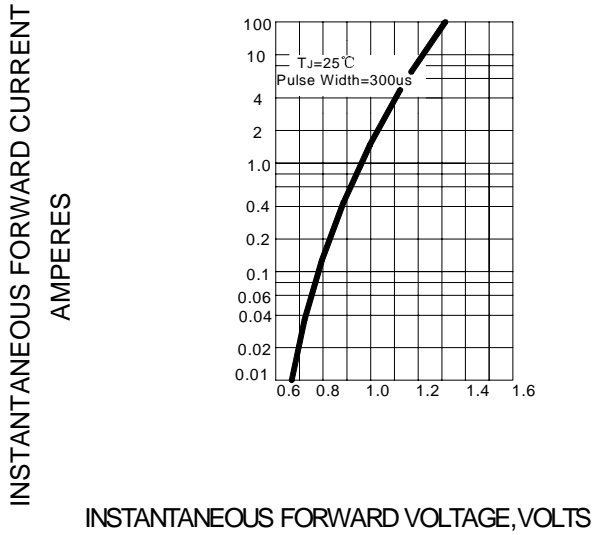

**FIG.2 - TYPICAL JUNCTION CAPACITANCE**

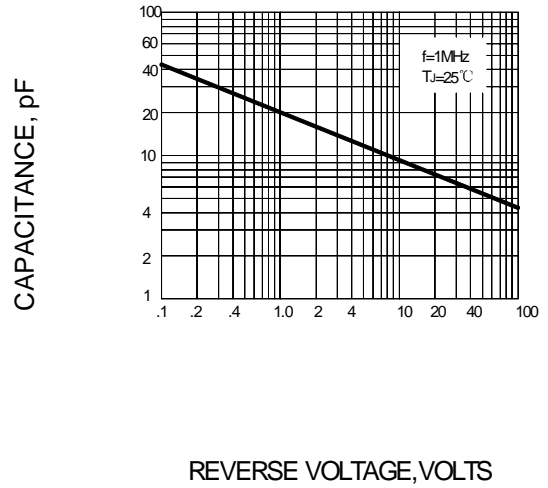

**FIG.3 - PEAK FORWARD SURGE CURRENT**

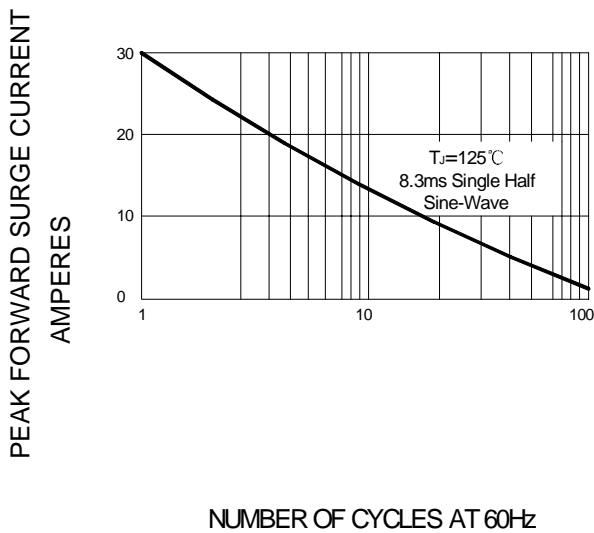

**FIG.4 - FORWARD DERATING CURVE**

